

AT 400 ALUMINIUM ENTRANCE DOOR

AT400 SQUARE-EDGED OUTSIDE AND INSIDE



Outside view



Inside view

Thermal insulation
(in W/m^2K)



U_D as low as 0.75

Sound reduction
(in dB)



up to 36

Security



up to RC 2

Design style


home pure

home soft

ambiente

Characteristics

- Concealed door hinges (optional)

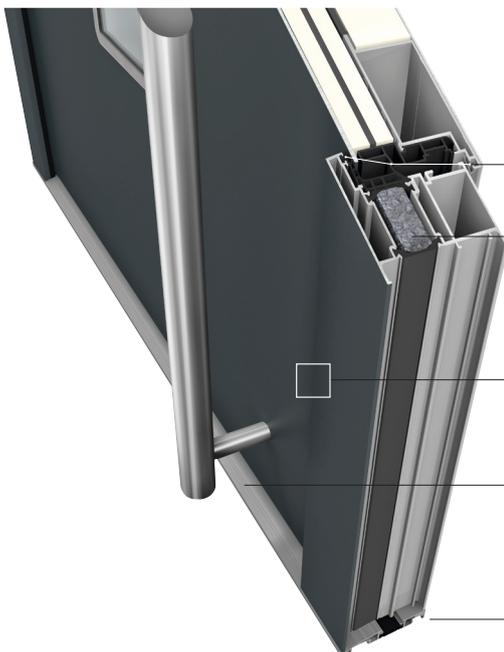

3 gasket levels

3-chamber frame profile and foam insulation core for very high thermal insulation


Square-edged design inside and outside

Low threshold thermally broken


Construction depth 93 mm

ALUMINIUM ENTRANCE DOOR AT 400

Sections

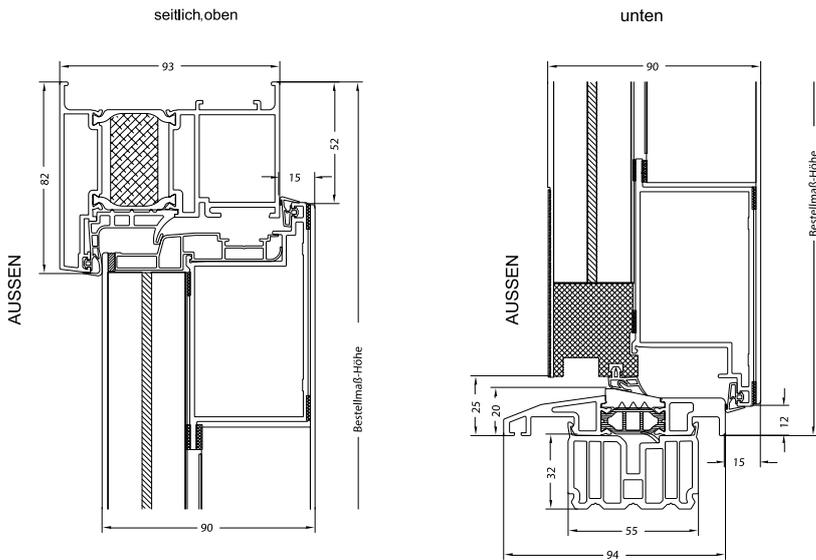

Isotherm

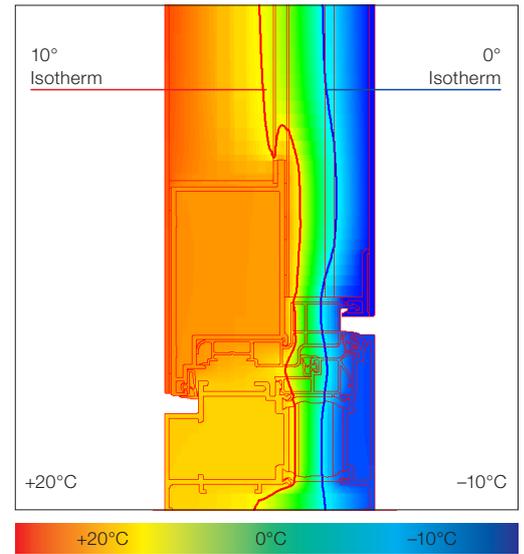

Door models



AT400-17-005



AT400-17-006



AT400-17-027



AT400-17-029



AT400-17-036



AT400-17-044



AT400-17-045



AT400-17-046



AT400-17-047

Online door designer



Internorm Window UK

Unit D, Colindale Business Park
2-10 Carlisle Road, NW9 0HN, London
Tel.: +44 (0) 208 205 9991

Email: office@internorm.co.uk